

PA-AD-S05

18G HDMI Repeater with Audio Extraction







STATEMENT

Read this user manual carefully before using this product. Pictures shown in this manual are for reference only, different model and specifications are subject to real product. This manual is for operation instruction only, not for any maintenance usage. The functions described in this version are updated till March, 2019. In the constant effort to improve our product, we reserve the right to make functions or parameters changes without notice or obligation. Please refer to the dealers for the latest details.

SAFETY PRECAUTION

To ensure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not dismantle the housing or modify the module to avoid electrical shock or burn.
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction.
- Do not expose the unit to rain, moisture or install this product near water.
- Install the device in a place with fine ventilation.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period of time.
- Refer all servicing to qualified service personnel.

CUSTOMER SERVICE

We provide limited warranty for the product within **three years** counting from the first day you buy this product (The purchase invoice shall prevail).

INTRODUCTION

The PA-AD-S05 is a small-size HDMI2.0 audio de-embedder with 1 HDMI input, 1 HDMI output, and three kinds of audio outputs. It is designed to extract audio from 4K HDMI signal via stereo balanced L/R audio, analog RCA, and coaxial digital audio output ports.

It supports 4K@60Hz/4:4:4 HDR, EDID & CEC pass-through, and the transmission rate is up to 18Gbps. Moreover, there are three audio modes can be chosen in order to be compatible with various audio processing device.

FEATURES

- Supports stereo balanced L/R audio, analog RCA, and coaxial digital audio output ports.
- Supports three audio modes:PASS, BITSTREAM, and PCM.
- HDMI input supports HDCP2.2, and the output supports HDCP1.4.
- Supports HDMI2.0 4K@60Hz/4:4:4 HDR, EDID & CEC pass-through.
- The transmission rate is up to 18Gbps
- Coax digital audio supports LPCM 2CH, Dobly Digital 2/5.1CH, DTS 2/5.1CH
- Supports HDMI High Bit Rate(HBR) audio pass through

Pro Acoustic Solutions



PACKAGE LIST

Please take an inventory of the package contents to ensure you have all the items listed below. If anything is missing or damaged, please contact your distributor for a replacement.

- 1 x MP-HUDE2-4K
- 1 x Power Adaptor (12VDC,1A)
- 1 x User Manual
- 1 x 5-pin Phoenix Connector
- 4 x Plastic Cushions

PANEL DESCRIPTION



- 1. Bicolor LED: RED when powered on, GREEN when HDMI signal input.
- 2. Audio Modes Switcher:
 - PASS (default): The source device obtains its EDID from display.
 - BITSTREAM: Set the audio block of the display EDID to DTS/Dolby with built-in multi-channel
 - EDID data of the MP-HUDE2-4K. Ensures the source output DTS/Dolby audio when the display only supports PCM audio.
 - **PCM:** Set the audio block of the display EDID to PCM with built-in PCM EDID data of the MPHUDE2-4K. Ensures the compatibility of the analog output.
- 3. HDMI IN: Connect with HDMI source.
- 4. FW: Firmware upgrade.
- 5. DC 12V: Connect with the included power adaptor.
- 6. HDMI OUT: Connect with HDMI display.
- 7. L/R: Stereo balanced L/R audio output.
- 8. L/R: analog RCA audio output.
- 9. COAX: Coaxial digital audio output.

SPECIFICATION

Video

Input (1) HDMI

Input connector (1) 19-pin type-A female HDMI 2.0, HDCP2.2

Output (1) HDMI

Output connector (1) 19-pin type-A female HDMI 2.0, HDCP1.4

Audio

Output (1) Stereo balanced audio L/R; (1) Analog audio L+R; (1) COAX

Output connector (1) 5-Pin phoenix connector;

Pro Acoustic Solutions

 $\textbf{Email:} \ \underline{info.proacousticsolutions@gmail.com, info@proacousticsolutions.com}$



(1) S/PDIF digital audioon an RCA connector;

(1) Coaxial audio connector;

(1) TOSLINK® optical digital audio connector;

(1) unbalanced stereo audio on a 3.5mm mini connector

Stereo analog audio format PCM

Coax digital audio format LPCM 2CH, Dobly Digital 2/5.1CH, DTS 2/5.1CH

General

Max data rate 18Gbit/s

Max resolution 4Kx2K@60Hz 4:4:4


Work Temperature $-10^{\sim} 55^{\circ}\text{C}$ Reference humidity $10\% \sim 90\%$ Power consumption3 W (Max)

Power supply Input: 100VAC~240VAC, 50/60Hz; Output: 12VDC 1A

Dimension (W*H*D) 129mm x 21.5 mm x77 mm

Net weight 244g

SYSTEM DIAGRAM

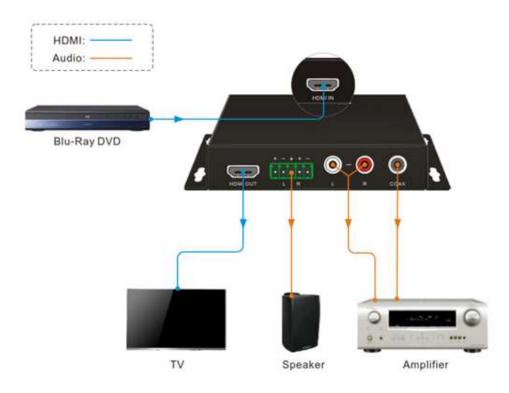

Note: This picture is for reference only, the specific scheme is subject to real devices.

* All specifications are subject to change due to continuous improvements